
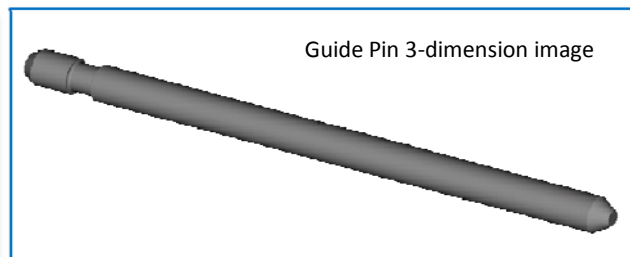


Product Name: GUIDE PINS

Low-price Stock Order for Market Standard Guide Pins for MPO Connector

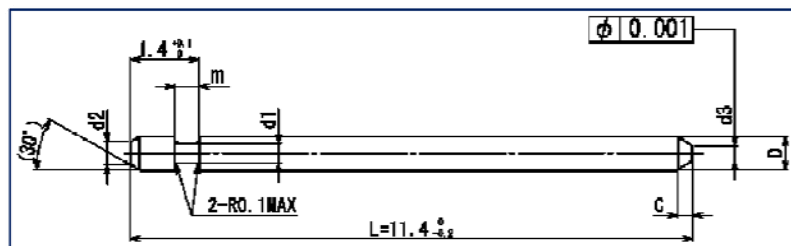

Guide Pin 3-dimension image


※chamfered side in the drawing is finished as round shape

Material : SUS420F, SUS303 (leadless, for RoHs)
other material is applicable upon request



Free from scratches when inserting and extracting, our guide pins excel in fitting. Highly approved by numbers of overseas customers with product order. We are now offering low-price stock order for a stable supply with the product matching with the domestic standard and a type of measurement well considered. A quality management is established in order to produce high-spec parts. R&D for products with rust resistancy and high-rigidity is also on-going.

	External Diameter		Groove Diameter		Groove Width		Length		d2	Tip Diameter		C	Note
	D	Tolerance	d1	Tolerance	m	Tolerance	L	Tolerance		d3	Tolerance		
Grade A	0.6985	±0.0001	0.4	0 -0.1	0.5	+0.1 0	11.4	0 -0.2	(0.47)	0.3	±0.05	(0.3)	
Grade B	0.6985	+0.0004 -0.0001											
Grade C	0.6985	±0.0005											
Grade D	0.6980	±0.0010											

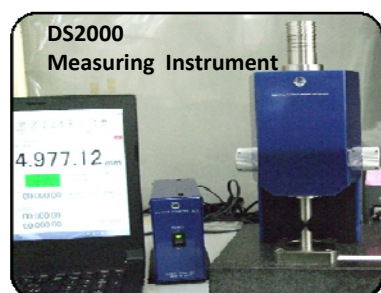

application to MPO connector

Guide Pins



Measurement using domestic standard DS2000
Measuring Instrument on external diameter (same
quality as Movotelt Measuring Instrument)

- Low-price stock order offering for a stable supply.
- Accepting various types of measurement on external diameter
- Manufacturing Special Order Products
(variations in tip shape, type of measurement, material, etc...)
- Extra rust resistancy, extra hardness, or non-magnetics product for customer's choice.
- Assembling of parts is available.

Memo

Feel free to ask us any questions.

TAIYO Stainless Spring Co.,Ltd.

1-15-17 MIHARADAI NERIMA-KU TOKYO 177-8501 JAPAN

Tel: 81-3-3922-4111 FAX: 81-3-5387-7279

URL <http://www.taiyo-sp.co.jp/en/>

Sales Representative :